



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

7 GPM: D128R


Product Specifications

Call 800-523-8499 to order the Dosatron for your specific application

| | |
|-------------------------------------|--|
| Dilution Range: | 1:200/1:128/1:100 (.5% to 1%) Pre-set at 1:128 |
| Water Flow Range: | .09 to 7 GPM |
| Operating Pressure Range: | 7 to 70 PSI |
| Available Housing Materials: | Polyacetal (Standard blue) |
| Dimensions: | 13" x 6 1/4" |
| Weight: | 4 lbs |
| Connection Size: | 3/4" NPT |
| Maximum Temperature: | 104° F |
| Included Accessories: | 6 ft clear suction tube, strainer, weight, mounting bracket and operating manual |
| Recommended Accessories: | 200 mesh filter, check valve, pressure regulator, flow restrictor. |



Basic Installation

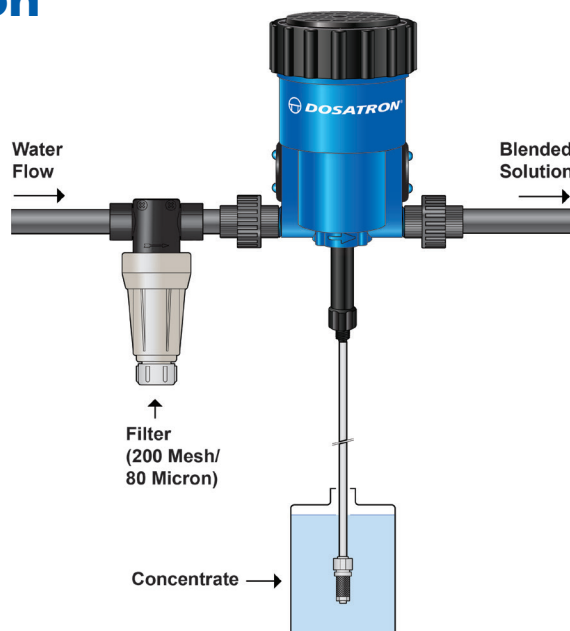

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.